

زیمبرگ



تراز لیزری ۴ بعدی
۱۶ خط

LZL-0044

[GREAT EXPERIENCE, GREAT WORKS]



 zimbergco.com

 zimberg.co

 info@zimbergco.com

 ٩...٨..٩

خدمات پس از فروش زیمبرگ



اصفهان

اردبیل

آذربایجان غربی

آذربایجان شرقی

خراسان جنوبی

چهارمحال و بختیاری

تهران

البرز

زنجان

خوزستان

خراسان شمالی

خراسان رضوی

قزوین

فارس

سیستان و بلوچستان

سمنان

کرمانشاه

کرمان

کردستان

قم

لرستان

گیلان

گلستان

کهگیلویه و بویراحمد

یزد

همدان

مرکزی

مازندران

برای اطلاع از آدرس و شماره تماس دفاتر خدمات شهرستانها، به وب سایت شرکت (ZIMBERGCO.COM) مراجعه نموده و یا با شماره سراسری و رایگان ۹۰۰۰۸۰۰۹ تماس بگیرید.

فهرست

۵	ویژگی‌ها
۵	ایمنی
۶	اجزای دستگاه
۶	راهنمای استفاده
۷	نگهداری
۸	گارانتی
۸	مشخصات

ویژگی‌ها

این محصول برای انواع کاربردهای داخلی یا خارجی آسان در استفاده است.

قبل از استفاده از این ابزار، تمام قوانین و دستورالعمل‌های ایمنی را مطالعه کنید.

- دارای سه خروجی پرتو لیزری ۳۶۰ درجه
- قابلیت استفاده در فاصله نزدیک به دیوار با حداقل فاصله ۶-۷ میلی‌متر
- مناسب برای استفاده در داخل و خارج از منزل
- قابلیت استفاده از براکت دقیق

ایمنی


قبل از استفاده از محصول، دستورالعمل‌ها و دفترچه راهنما را به دقت مطالعه کنید.

■ مراقب باشید که چشم‌های خود را به پرتو لیزر نزدیک نکنید. تماس با پرتو لیزر برای مدت طولانی با چشمان‌تان ممکن است خطرناک باشد.

■ لیزر را باز نکنید. در داخل آن قطعه‌ای که بتوانید تعمیر کنید، نیست.

- به هیچ‌وجه به کودکان اجازه‌ی استفاده از تراز لیزری را ندهید.
- از تماس اعضای بدن با پرتو لیزر خودداری کنید زیرا ممکن است خطرآفرین باشد.
- بعد از شارژ شدن باتری، آن را از برق بکشید.

اجزای دستگاه

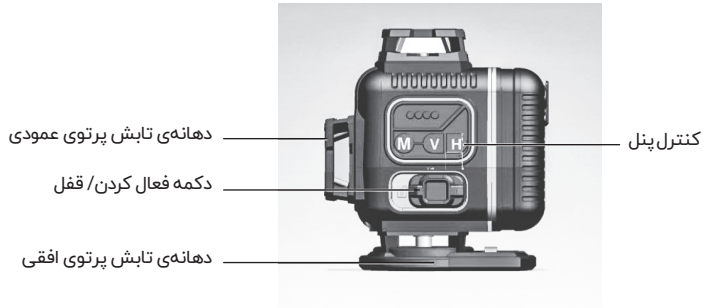


راهنمای استفاده

۱. شارژ

سر پلاگ شارژر را به پریز برق وصل کنید؛ سپس باتری را به درستی در شارژر قرار دهید. هنگامی که باتری در حال شارژ شدن است، چراغ قرمز روشن است. هنگامی که باتری به طور کامل شارژ شود، چراغ سبز روشن می‌شود. در این حالت، شارژر را از برق جدا کنید تا باتری از شارژر خارج شود. توجه: اجازه ندهید باتری به طور کامل خالی شود.

۲. قرار دادن دستگاه

می‌توانید دستگاه را مستقیماً روی میز یا زمین صاف قرار دهید (اگر خط لیزری چشم‌کزن شد و صدای بوق هشدار را شنیدید، نشان‌دهنده این است که ابزار از محدوده تراز خارج شده است و باید آن را تراز کنید).

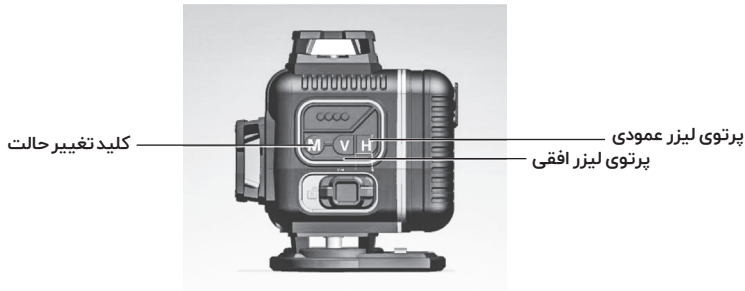

نگهداری

۱. ابزار را نباید باز کنید. در صورت داشتن هرگونه سؤال، لطفاً با شرکت زیمبرگ تماس بگیرید.
۲. از وارد شدن ضربات ناگهانی به دستگاه، جلوگیری کنید تا دقت و عملکرد ابزار را تحت تأثیر قرار ندهد.
۳. کامل خالی شدن باتری می‌تواند به آن آسیب بزند. اگر برای مدت زمان طولانی از دستگاه استفاده نمی‌کنید باتری را خارج کنید. باتری دستگاه، معمولاً هر یک تا دو ماه باید شارژ شود.
۴. لطفاً پس از شارژ شدن باتری، بلافاصله آن را از برق بکشید. شارژ بیش از اندازه، عمر باتری را کوتاه خواهد کرد.
۵. لطفاً از پارچه نرم برای تمیز کردن سطح ابزار استفاده کنید. ابزار نباید خیس شود.
۶. شیشه‌های لیزر می‌توانند با الکل پاک شوند.
۷. ابزارها باید در مکان‌های خشک نگهداری شوند.

گارانتی

توجه داشته باشید که هیچ‌کدام از اجزای داخلی این ابزار احتیاج به تعمیرات اضافه یا دستکاری جهت بهینه نمودن عملکرد ندارند، بنابراین از هرگونه دستکاری یا ارایه به مراکز تعمیرات غیر مجاز اجتناب کنید. از آنجا که این دستگاه نباید باز شود و نیازی به بهینه کردن عملکرد ندارد، این کالا شامل گارانتی نمی‌شود.

مشخصات	
طول موج	۵۱۵ نانومتر
دقت	± 3 میلی‌متر/۱۰ متر
محدوده تراز / جبران	$1^{\circ} \pm 4^{\circ}$
فاصله کاری (خط)	۳۰ متر
منبع انرژی	باتری لیتیومی ۳۶۰۰ میلی آمپر ساعتی
محدوده دمای عملیاتی	$50^{\circ}C \sim -10^{\circ}C$
اندازه مانت	۱/۴-۲۰

Warranty

Note that none of the internal components of this tool require additional repairs or manipulation to optimize performance, so avoid any tampering or delivery to unauthorized repair centers. Since this device should not be opened and does not need to be optimized for performance, this product does not come with a warranty.

Specification	
Laser Wavelength	515 nm
Accuracy	± 3 mm/10m
Self-Laveling Range	4° ± 1°
Working Range	30m
Power supply	3600mAh lithium battery
Operation Temperature Range	-10°C ~+ 50°C
Mount Size	1/4-20 mounting thread

2. Placement of instruments

Can be placed directly on the table or flat ground (if the laser line flickers and alarms, indicating that the instrument has exceeded the level range, it should be adjusted to level it).

3. The main engine is fixed on the tripod.

Tripod blisters should be in the middle. Connect the tripod with the bottom 14/ thread of the instrument.

Switch and remote control operation





1.Horizon laser line
2.Vertical laser line

3.Indoor/outdoor mode button

Maintenance

- 1** Do not disassemble the instrument at will. If you have any questions, please contact our company.
- 2** Do not fall, knock or shake the instrument, so as not to affect the accuracy and function of the instrument.
- 3** Excessive discharge can damage the battery. Remove the battery if you don't use it for a long time. Instrument batteries should be charged every one to two months.
- 4** Please charge the battery at the prescribed time. Overcharging will shorten the life of the battery.
- 5** Please use soft cloth and neutral detergent to clean the surface of the instrument. The clean instrument should be thoroughly dried.
- 6** Laser glass can be wiped with alcohol.
- 7** Instruments should be stored in dry and dull places.
- 8** Ensure that the switch is locked and kept closed during transportation.

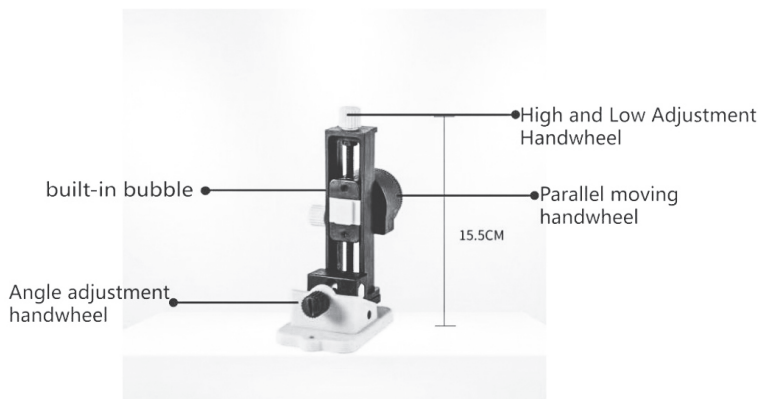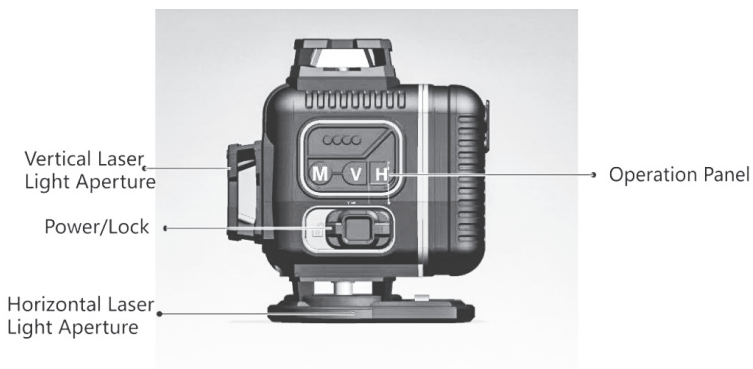

Operation

1. Charge

Plug the plug of the charger into the AC socket, and then properly load the battery into the charger. The battery pack charges normally and the red light is always on. When the battery is fully charged, the green light is always on. At this time, the plug of the charger is removed from the AC socket, and the battery is removed from the charger.

Note: Batteries can not be used up. If the instrument shows low power and alarms, please replace the battery immediately. The instrument charges the batteries every 23- months from the date of leaving the factory.

Functions

This product is equipped with high light green laser modules, a safety feature and integrated rubber that protect it from damage. This product is easy to use for a variety of applications whether indoor or outdoor.

Read, understand and follow all safety rules and instructions before using this tool.

Output of three 360 degree line lasers

Alignment operation of different plane space requires one tool only.

* Can be used close to the wall, and the minimum distance from the wall is 67- mm.

Suitable for indoor and outdoor use.

Carefully designed accessory bracket expands the use of the instrument

User security

1. Do not look directly at the laser output window.
2. The instrument uses 18650 lithium battery, positive and negative poles can not be misconnected.
3. Please unplug the charger after charging.
 - Do not modify the laser in any way. Modifying the tool may result in hazardous Laser Radiation Exposure.
 - Do not operate the laser around children or allow children to operate the laser.
 - An exposure to the beam of a Class 2 laser is considered safe for a maximum of 0.25 seconds. Eyelid reflexes will normally provide adequate protection.

List

Functions	5
User security	5
Operation	6
Maintenance	7
Warranty	8
Specification	8

Zimberg After Sales Service



East Azerbaijan	West Azerbaijan	Ardabil	Isfahan
Alborz	Tehran	Chaharmahal and Bakhtiari	South Khorasan
Razavi Khorasan	North Khorasan	Khuzestan	Zanjan
Semnan	Sistan and Baluchestan	Fars	Ghazvin
Ghom	Kordestan	Kerman	Kermanshah
Kohgiluyeh and Boyer-Ahmad	Golestan	Gilan	Lorestan
Mazandaran	Markazi	Hamedan	Yazd

For more information about the contact details and address of the company's Authorized Service Centers, please visit our website ZIMBERGCO.COM or call free telephone No.90008009

[GREAT EXPERIENCE, GREAT WORKS]



 zimbergco.com

 [zimberg.co](https://www.instagram.com/zimberg.co)

 info@zimbergco.com

 90008009

[ZIMBERG]



LASER LEVEL
4D
LZL-0044